







Configuring the Zoiper on iPhone 3.6.1 for SIP Registration

This guide shows you the steps to configure a SIP phone to register with Twilio. If you have any feedback on the following guide please email us at: sip.interconnectionguides@twilio.com

General Notes

- Please see separate instructions on creating Programmable Voice - SIP domains. This guide assumes these steps have already been done.
- User-credentials are required to register phones. IP ACLs alone are not sufficient. Your AuthorizationName should match the username on the SIP endpoint and both of those should match a user credential that you entered on Twilio's console.
- A SIP URI is: sip:username@SIPDomain or sip:phonenumber@SIPDomain
- When this document refers to **TwilioSIPDomain** it represents: **yourdomain.sip.region.twilio.com** where you have selected **yourdomain** on Twilio's console (globally unique) and **region** which is initially US1 (North-Virginia) only and other regions later.

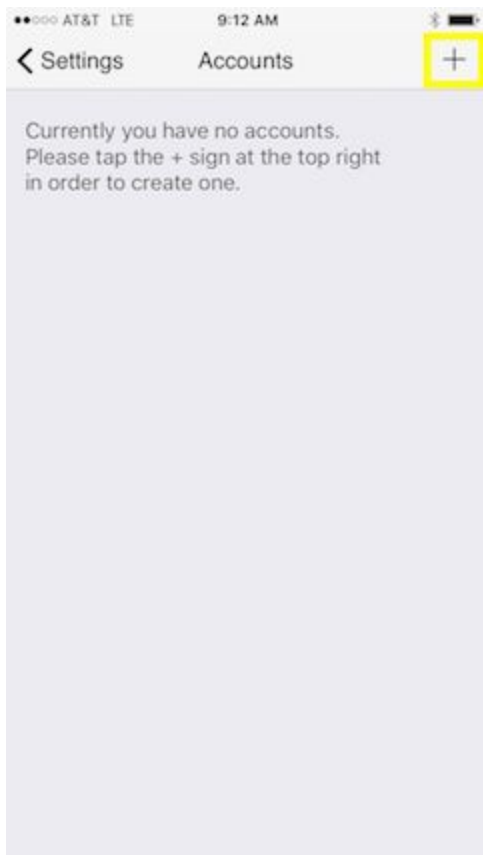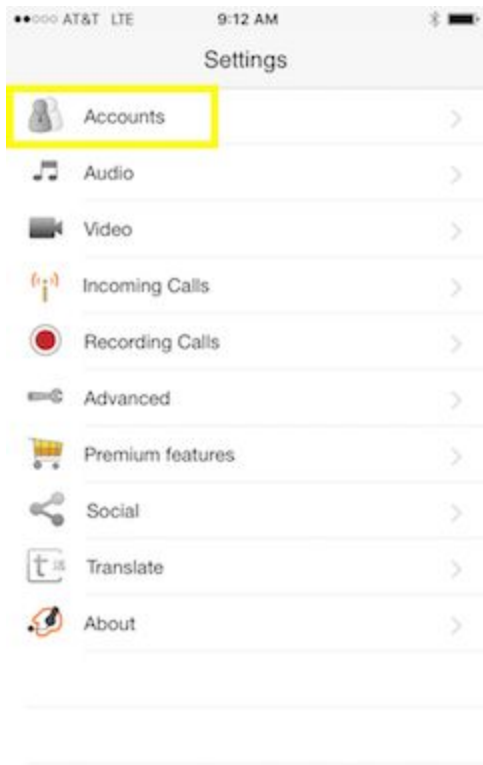


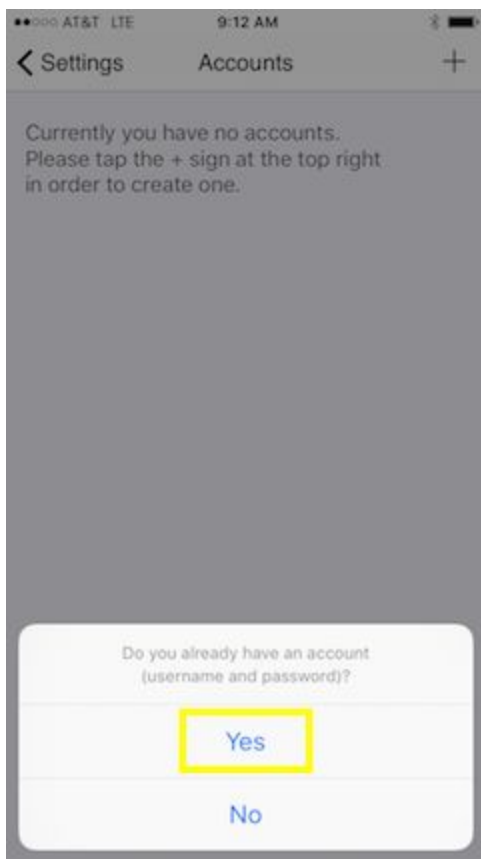

CHOOSE AN ACCOUNT TYPE


 SIP account >

 IAX account >



Enter the following details as seen in following image:

- a. **Account Name:** Your choice
- b. **Display As:** Your choice
- c. **Username:** This is the **username** for authentication. It must match the username configured in the Twilio console credentialList.
- d. **Password:** This is the password corresponding to the username in the credentialList that you configured for your TwilioSIPDomain.
- e. **Domain: TwilioSIPDomain**
- f. Toggle Enable - if registration succeeded you will see *Registered* for Account Status.
- g. Save

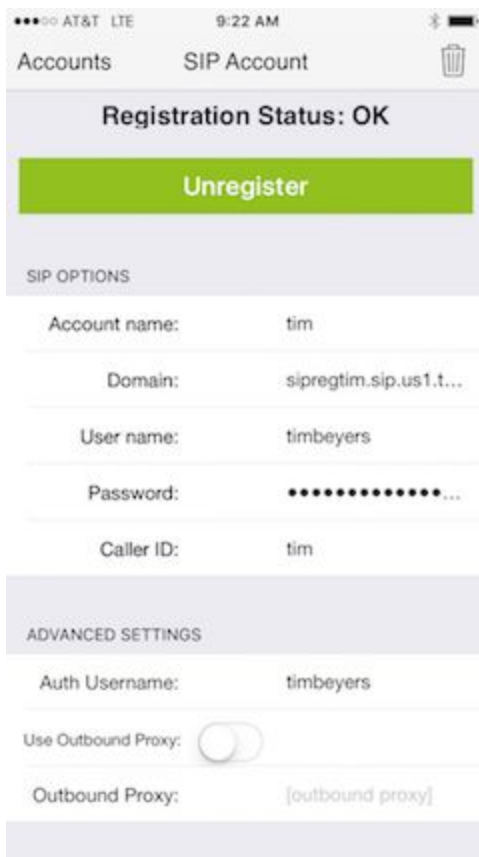

In your accounts page the green icon below indicates you are registered and the arrows in both directions indicates you can make and receive calls.

Congrats - you're done!

For troubleshooting you can:

1. Settings > Advanced Settings. If Verbose Logging is OFF, turn it to ON and tap Apply Changes.
2. Reproduce the problem.
3. Settings > Advanced Settings. Tap Send Log. A prompt appears.